

LED DIGITAL WINDOW SIGNAGE MODEL PRO 4 mm

INFORM. ANNOUNCE. COMMUNICATE.


Dynamic Communication


inSceneDIGITAL offers a dynamic alternative to traditional commercial window signage. Broadcast and schedule your messages, images or videos via our content based management software. Scheduling and content management is easy from any location and changes are applied to the screens immediately.

An LED digital sign installed inside your store window will be visible from more than 80 metres away, day or night. Easy to maintain, they feature low energy consumption, are protected against the risk of electrical shock and can run 24 hours a day.



**DYNAMIC COMMUNICATION TOOL**
Dynamic signage makes it possible to adapt your messages to different markets.

**EFFECTIVE MULTI-MEDIA SOLUTION**
Build your brand using images and videos in the same broadcast.
Optimal return on investment and rapid results through your marketing strategy – made dynamic.

**ECONOMICAL**
Dynamic communication allows for multiple messages to be broadcast over the life of your marketing campaign – then re-tailored to fit the next campaign. You can even test your message's performance to optimize its effectiveness.


**SIMPLE, FLEXIBLE BROADCASTING**
Our easy-to-use management software lets you remotely plan the broadcast of your changing content in minutes.

inSCENEDIGITAL

TECHNICAL SPECIFICATIONS MODEL PRO 4 mm

Model	PRO 4 mm
Display Area (W x H)	1280 x 640 mm 50.39 x 25.19 in
Total Dimensions (including frame) (W x H x D)	1280 x 640 x 105 mm 50.39 x 25.19 x 4.13 in
Stackable	Yes
LED spacing	4 mm
LED configuration	SMD 3.1
Pixel resolution (px)	320 x 160
Colour capacity	16 bits
Brightness	4500 nits
Light and Temperature sensor	Yes
LED display dimming	256
Refresh rate	2000 Hz +
Frequency	60 Hz +
Colour type	RGB
Viewing distance	5 m
Viewing angle	H140°, V120°
Lifetime	100 000H+

Power	AC-110-240V
Warranty (parts & labour)	3 years
Compliance	CE-UL
Maximum power consumption	656w
Average power consumption	265w
Working temperature	-5/60°C 23/140°F
Working humidity	10-80%
Working environment	Window interior
Frame	Aluminum
Weight	80 lbs
Orientation	Portrait – landscape
Back Frame	Hanging
Player	Included
Software	Included
Communication	Wired+wifi
Speaker(s)	Option

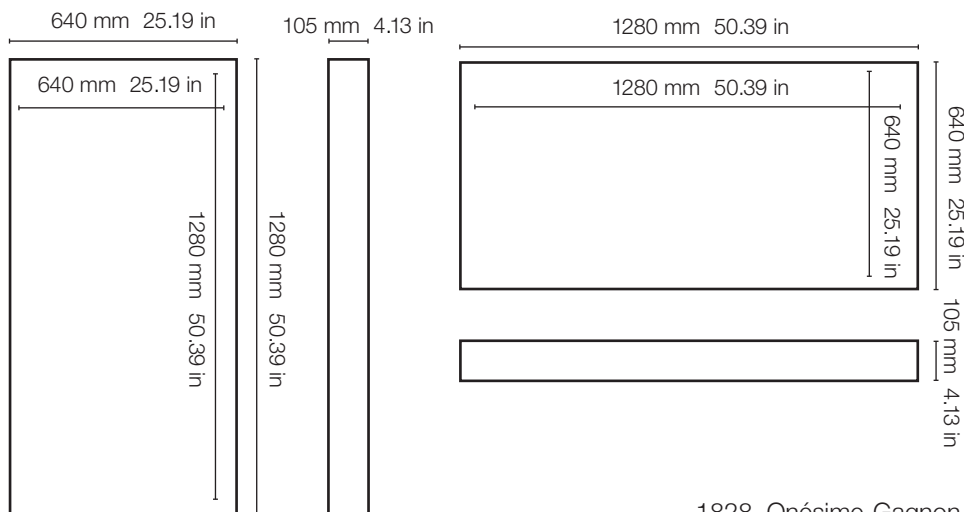

inSceneDIGITAL LED signage are distributed by
Skyline Entourage and powered by Nummax.

1828, Onésime-Gagnon
Lachine (Québec) H8T 3M6
514.780.8810

<http://www.skylinemontreal.com/en/insceneinteractive/>

inSCENE**DIGITAL**